



CONTENT

| | |
|--|----|
| Topic:100 Gbit - Highspeed connection | 2 |
| Topic:Accessories for especially heavy components in the server rack | 4 |
| Topic:Audio & Video for Digital Meetings..... | 6 |
| Topic:AV over IP Solutions | 8 |
| Topic:Desktop KVM Solutions | 11 |
| Topic:Elegant housing for your SSD/HD Media..... | 13 |
| Topic:Ergonomic Desk Frames (New Arrivals) | 15 |
| Topic:HDBaseT Video Solutions | 17 |
| Topic:HDMI - adapter cable For your individual solution | 19 |
| Topic:HDMI cable for demanding applications | 22 |
| Topic:High Flex HDMI cable - space-saving and almost invisible | 24 |
| Topic:Home Office, Video conferencing | 25 |
| Topic:Keep a cool head - Roof- and Split Cooling Devices for Network- and Server Cabinets | 27 |
| Topic:KVM - consoles providing maximum flexibility | 29 |
| Topic:Secure basic power distribution solutions for devices in 19" Network & Server cabinets | 31 |
| Topic:Secure remote power distribution solutions for your Edge applications | 37 |
| Topic:Shelves inclusive cable management for high load capacities..... | 40 |
| Topic:Spiral cables for the car | 43 |

Topic: 100 Gbit - Highspeed connection

Products:

Nr.: DN-81630

EAN: 4016032480891

DIGITUS 100Gbs QSFP28 SR4 Optical Transceiver
100Gbs QSFP28 CWDM4 Optical Transceiver Module

- Low power consumption <3.5W
- 3.3V power supply voltage
- Four-channel full-duplex transceiver modules

Link: [ASSMANN Website](#)

Nr.: DN-81631

EAN: 4016032483427

DIGITUS 100Gbs QSFP28 SR4 Optical Transceiver
100Gbs QSFP28 SR4 Module

- 3.3V power supply voltage
- Operating case temperature 0°C to +70°C
- Low power consumption <3.5W

Link: [ASSMANN Website](#)

Nr.: DN-81601 | DN-81602

EAN: [4016032481041](#) | [4016032481065](#)

DIGITUS 100G QSFP28 DAC Cable, AWG 30

100G QSFP28 Direct Attach Cable Up to 28.3125Gbps data rate per channel, diff. lengths

- Maximum aggregate data rate: 100Gb/s (4x 25Gb/s)
- 100G QSFP28 to QSFP28
- Compatible switch: CISCO, 3COM, D-LINK, ENTERASYS, EXTREME, FINISAR, FORCE 10, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL, Allnet, Dell, D-Link, Edimax, Etherwan, Fortinet ... etc.
- Lengths: 1m, 2m

Link: [ASSMANN Website](#)



Nr.: DN-81625

EAN: 4016032480983

100Gbps QSFP28 Active Optical Cable 5m

100G QSFP28to QSFP28Active Optical Cable MMF 850nm, 5m

- 4 channels full-duplex transceiver modules
- 4 channels 850nm VCSEL array, 4 channels PIN photo detector array
- Transmission data rate up to 28.05Gbps per channel, 100Gbps total

Link: [ASSMANN Website](#)



Nr.: DN-81621

| DN-81622

| DN-81623

EAN: [4016032480969](#)

| [4016032480945](#)

| [4016032480976](#)

DIGITUS 100Gbps QSFP28 Active Optical Cable

100G QSFP28to QSFP28Active Optical Cable MMF 850nm, diff. lengths

- Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- Hot Pluggable QSFP form factor, Single MPO connector receptacle
- Built-in digital diagnostic functions
- Lengths: 1m, 2m, 3m

Link: [ASSMANN Website](#)



Nr.: DN-81603

| DN-81605

EAN: [4016032481096](#)

| [4016032481126](#)

DIGITUS QSFP28 100G 3m DAC cable

100G QSFP28 Direct Attach Cable Up to 28.3125Gbps data rate per channel, different length

- QSFP+ 100G 3m DAC
- Maximum aggregate data rate: 100Gb/s (4 x 25Gb/s)
- 100G QSFP28 to QSFP28
- Length: 3m; 5m

Link: [ASSMANN Website](#)



Topic: Accessories for especially heavy components in the server rack
Products:

Nr.: DN-19 GS-NW
EAN: 4016032366454

L-Support Sliding Rails for 483mm (19") Network Cabinets

Slide rails, L shape, for 600-800mm depth racks adjustable 350-600mm depth, set with 2 pieces

- Easy installation
- Variable in depth: 350mm to 600mm

Link: [ASSMANN Website](#)



Nr.: DN-19 GS-SRV
EAN: 4016032366461

L-Support Sliding Rails for 483mm (19") Server Cabinets

Slide rails, L shape, for 800-1000mm depth racks adjustable 500-750mm depth, set with 2 pieces

- Easy installation
- Variable in depth: 500mm to 750mm

Link: [ASSMANN Website](#)



Nr.: DN-19 TRAY-1-1000
EAN: 4016032135487

Shelf for Fixed Installation in 483mm (19") Cabinets

1U fixed shelf for racks from 1000mm depth, 44x483x737mm, up to 100kg, grey (RAL 7035)

- Perfect for storage of components which are not 483mm (19") suitable
- Slim design which takes space of 1 height unit
- Easy and quick to mount or dismount

Link: [ASSMANN Website](#)



Nr.: DN-19 TRAY-1-1000-SW
EAN: 4016032147312

Shelf for Fixed Installation in 483mm (19") Cabinets

1U fixed shelf for racks from 1000mm depth, 44x483x737mm, up to 100kg, black (RAL 9005)

- Perfect for storage of components which are not 483mm (19") suitable
- Slim design which takes space of 1 height unit
- Easy and quick to mount or dismount

Link: [ASSMANN Website](#)



Nr.: DN-19 TRAY-2-1000

EAN: 4016032135494

Extendible Shelf for 483mm (19") Cabinets

1U extendible shelf for 1000mm depth racks, 44x483x720mm, up to 65kg, grey (RAL 7035)

- Extractable, with handle bar
- For fixing at the four 483mm (19") mounting profile rails

Link: [ASSMANN Website](#)

Nr.: DN-19 TRAY-2-1000SW

EAN: 4016032180401

Extendible Shelf for 483mm (19") Cabinets

1U extendible shelf for 1000mm depth racks, 44x483x720mm, up to 65kg, black (RAL 9005)

- Extractable, with handle bar
- For fixing at the four 483mm (19") mounting profile rails

Link: [ASSMANN Website](#)

Nr.: DN-CT-10M-20

EAN: 4016032338260

Velcro Tape for structured cabling

Velcro Tape, 20 mm wide for structured cabling, 10 m roll, color black

- Structure your cabling in an easy and efficient way
- The tape fits close and regularly and doesn't put too much pressure on the cable - perfect for sensitive installations
- Re-usable

Link: [ASSMANN Website](#)



Topic: Audio & Video for Digital Meetings

Products:

Nr.: DA-70822

EAN: 4016032478652

USB-C™ - HDMI Graphics Adapter Cable, UHD 8K / 60Hz

USB-C - HDMI Adapter, 20cm 8K/60Hz, silver, aluminium housing

- Universal USB-C™ Graphics Adapter with HDMI Output
- Full 8K resolution at 60 Hz
- With integrated audio transmission for a Dolby Surround sound experience



Link: [ASSMANN Website](#)

Nr.: DA-70824

EAN: 4016032478720

USB-C™ - DisplayPort Graphics Adapter, UHD 8K / 30 Hz

USB-C - DP Adapter, 20cm 8K/30Hz, silver, aluminium housing

- Universal USB-C™ Graphics Adapter with DisplayPort Output
- Full 8K resolution at 30Hz
- With integrated audio transmission for a Dolby Surround sound experience



Link: [ASSMANN Website](#)

Nr.: DA-70828

EAN: 4016032485629

USB Type-C 4K 2-in-1 HDMI Graphics Adapter

USB-C - 2x HDMI Adapter, 18cm 4K/30Hz, Silver, Aluminium housing

- Universal USB-C Graphics Adapter with 2 HDMI outputs
- Resolution with one HDMI monitor 4K/60Hz
- Resolution with 2 HDMI monitors 4K/30Hz

Link: [ASSMANN Website](#)



Nr.: DA-70826

EAN: 4016032478751

USB Type-C™ 4K 2-in-1 DisplayPort + HDMI Graphics Adapter

USB-C - DP + HDMI Adapter, 20cm 4K/30Hz, silver, aluminum housing

- Universal USB-C™ Graphics Adapter with DisplayPort and HDMI Output
- Full 4K resolution at 30Hz
- With integrated audio transmission for a Dolby Surround sound experience

Link: [ASSMANN Website](#)



Nr.: DA-70825

EAN: 4016032478737

USB Type-C™ 4 K 2-in-1 Mini DisplayPort + VGA Graphics Adapter

USB-C - mini DP + VGA Adapter, 20cm 4K/30Hz, silver, aluminum housing

- Universal USB-C™ Graphics Adapter with Mini DisplayPort and VGA Output
- Full 4K resolution at 30Hz
- With integrated audio transmission for a Dolby Surround sound experience (except for VGA)

Link: [ASSMANN Website](#)



Nr.: DA-70827

EAN: 4016032478768

USB Type-C™ 4K 2-in-1 DisplayPort + VGA Graphics Adapter

USB-C - DP + VGA Adapter, 20cm 4K/30Hz, silver, aluminum housing

- Universal USB-C™ Graphics Adapter with DisplayPort and VGA Output
- Full 4K resolution at 30Hz
- With integrated audio transmission for a Dolby Surround sound experience (except for VGA)

Link: [ASSMANN Website](#)



Topic: AV over IP Solutions

Products:

Nr.: DS-55507

EAN: 4016032478935

HDMI KVM IP Extender Set

HDMI KVM Extender Set over IP 150m, Full HD 1080p

- Extends the maximum length for HDMI cables to up to 150m via a simple network cable
- Extension of the signal (unlimited distance) via the existing local network infrastructure or commercial network switches (IP connection)
- Supports video resolutions up to: Full HD (1920x1200/60Hz, 4:4:4)

Link: [ASSMANN Website](#)



Nr.: DS-55129

EAN: 4016032467458

4K HDMI® KVM Extender Set, CAT / IP, 100m

HDMI KVM Extender Set, TCP/IP, 100m 3x USB, 4K/30Hz

- Supports resolutions of up to 4K / 30Hz
- KVM functionality: 2 x USB A on receiver module for keyboard & mouse
- Additional USB A port on the receiver module for peripheral equipment (USB 2.0, Hi-Speed, 480Mbps)

Link: [ASSMANN Website](#)



Nr.: DS-55202

EAN: 4016032429432

HDMI KVM Extender over IP, Set

HDMI KVM Extender, 120m, Full HD, 1080p over network cable (Cat 5, 5E, 6),

- Extends the maximum length for HDMI cable to up to 120m via a simple network cable
- Extension of the signal (unlimited distance) over the existing local network infrastructure (over IP connection)
- Highest supported video resolution: 1080p / 60Hz

Link: [ASSMANN Website](#)



Nr.: DS-55122

EAN: 4016032448976

4K HDMI Extender via CAT / IP (Set)

4K HDMI Extender Set over IP, 4K*2K@30Hz over network cable (CAT 5/5e/6/7), black

- Use additional receiver units (DS-55123) and your existing network infrastructure to display your video content on up to 253 screens (IP connection)
- Extends 4K video content to up to 120m with a CAT 6 cable (point-to-point connection)
- Signal extension (unlimited distance) via the existing local network infrastructure (IP connection)



Link: [ASSMANN Website](https://www.assmann.com)

Nr.: DS-55124

EAN: 4016032455202

4K HDMI Extender via CAT/IP (Set), PoE

4K HDMI Extender Set over IP/CAT 5, 6 (120 m) complete PoE powered, UHD 4K@30Hz

- Up to 120m extension of 4K video contents with a CAT 6 cable (point-to-point connection)
- HDMI signal can be extended (unlimited distance) with the existing local network infrastructure or additional PoE switches (IP connection)
- Use additional receiver units (DS-55125) and your existing network infrastructure or additional PoE switches to display video contents on up to 253 screens (point-to-multipoint connection)



Link: [ASSMANN Website](https://www.assmann.com)

Nr.: DS-55120

EAN: 4016032365815

HDMI Video Extender over CAT 5 / IP with IR function

HDMI Video Extender over Cat5 with IR Control up to 120 m (CAT5e/CAT6), 1080p, 3D support, black

- For extension up to 120m (1 to 1 connection)
- Display your video content to up to 253 screens by using additional receiver units and your existing network infrastructure (over IP connection)
- Easy and convenient distribution for HDMI signals - Place your displays wherever you want without HDMI cable limitations



Link: [ASSMANN Website](https://www.assmann.com)

Nr.: DS-55123

EAN: 4016032448990

4K HDMI Extender via CAT / IP (receiver unit)

4K HDMI Extender over IP, 4K*2K@30Hz over network cable (CAT 5/5e/6/7), Receiver Unit

- Use additional receiver units (DS-55123) and your existing network infrastructure to display your video content on up to 253 screens (IP connection)
- Extends 4K video content to up to 120m with a CAT 6 cable (point-to-point connection)
- Signal extension (unlimited distance) via the existing local network infrastructure (IP connection)

Link: [ASSMANN Website](https://www.assmann.com)



Nr.: DS-55125

EAN: 4016032455219

4K HDMI Extender via CAT/IP (receiver unit), PoE

4K HDMI Extender, Receiver Unit over IP/CAT 5, 6 (120m), POE powered

- Use additional receiver units (DS-55125) and your existing network infrastructure or additional PoE switches to display video contents on up to 253 screens (point-to-multipoint connection)
- Power supply through PoE switch - no external power supply required
- Supports CAT 5, CAT 5e, CAT 6 and CAT 7 network cables

Link: [ASSMANN Website](https://www.assmann.com)



Nr.: DS-55121

EAN: 4016032367529

HDMI Video Extender over Cat5, Receiver Unit

HDMI Video Extender over Cat5 Receiver Unit up to 1080p, up to 253 Units, for multiple display

Link: [ASSMANN Website](https://www.assmann.com)



Topic: Desktop KVM Solutions

Products:

Nr.: DS- 12850

EAN: 4016032466833

KVM Switch, 2-Port, 4K60Hz, 2 x DP in, 1 x DP/HDMI out

KVM Switch, 2x1 DP, DP/HDMI Out, USB 4Kx2K@60Hz

- Use a monitor, a mouse and a keyboard to operate two computers
- USB ports for mouse and keyboard
- Audio connections for microphone/speaker

Link: [ASSMANN Website](#)

Nr.: DS-12880

EAN: 4016032468639

KVM Switch, 4 Port, Single Display, 4K, HDMI®

Desktop HDMI KVM Switch

- Use one monitor, a mouse and keyboard to operate 4 computers with single display
- Supports a maximum UHD resolution of 4K / 30Hz + Free Sync
- USB ports for mouse and keyboard

Link: [ASSMANN Website](#)

Nr.: DS-12901

EAN: 4016032479987

KVM Switch, 2 Port, 4K30Hz, USB-C/USB/HDMI in, HDMI out, Network

2port Type C KVM with Network Port

- Use one monitor, mouse and keyboard to operate two computers
- Support 1x USB-C™ notebook computer (incl. Macbook)
- Provide LAN connection to USB-C™ notebook computer via USB-C™ cable

Link: [ASSMANN Website](#)



Nr.: DS-23300-2
EAN: 4016032429999

USB-PS/2 Combo-KVM Switch

16-port Combo-KVM switch, 1 user, 16 PCs, IP function module slot



- Controls several PCs with one PS/2 or USB keyboard, one PS/2 or USB mouse, and one monitor
- Extension via cascading possible
- Emulates a keyboard on each PC to allow your computers to boot normally without a keyboard error

Link: [ASSMANN Website](https://www.assmann.com)

Nr.: AK-330107-010-S | AK-330107-030-S | AK-330107-050-S
EAN: [4016032290940](https://www.assmann.com) | [4016032290964](https://www.assmann.com) | [4016032290971](https://www.assmann.com)

HDMI High Speed with Ethernet Connection Cable

HDMI High Speed connection cable, type A M/M, 1.0m, Ultra HD 60p, gold, bl



- Supports UHD up to 4K/60Hz
- Supports 3D signal transmission
- Supports ARC (bidirectional audio transmission) - Use a microphone and speakers via a cable

Link: [ASSMANN Website](https://www.assmann.com)

Topic: Elegant housing for your SSD/HD Media
Products:

Nr.: DA-71105-1

EAN: 4016032480754

2.5" SSD/HDD housing, SATA I-III - USB 3.0

USB3.0 2.5" SATA SSD/HDD enclosure with aluminium housing

- Supports SATA I-III SSDs/HDDs with a design height of 9.5mm oder 7.0mm
- Supported capacity: up to 2TB
- USB 3.0 data transfer rate up to 5Gbps

Link: [ASSMANN Website](#)



Nr.: DA-71106

EAN: 4016032416173

3.5" SSD/HDD Enclosure, SATA 3 - USB 3.0

SSD/HDD SATA Enclosure 3.5" USB3.0, for SATA III HDD 3.5", Alu, w/o PSU

- Supports SATA I-III SSDs/HDDs with a size of 3.5" or 2.5"
- Support capacity: up to 4TB
- USB 3.0 data transfer rate up to 5Gbps

Link: [ASSMANN Website](#)



Nr.: DA-71111

EAN: 4016032390541

External SSD Enclosure, M.2 - USB 3.0

SSD Enclosure, M2 USB3.0, M.2 (NGFF), B-Key, Chipset: ASM1153E

- Supports M.2 SATA SSDs
- SATA - data transfer rate of up to max. 6 Gbit/s
- Supports M.2 module type 2280 (80mm), 2260 (60mm), 2242 (42mm) and 2230 (30mm)

Link: [ASSMANN Website](#)



Nr.: DA-71115

EAN: 4016032433231

External SSD Enclosure, M.2 - USB Type-C™

USB Type-C 3.1 External SSD Enclosure M.2 (NGFF) B-Key, alu housing, black, chipset: JMS580

- Supports M.2 SATA SSDs
- Supports M.2 module type: 2280 (80mm), 2260 (60mm), 2242 (42mm) and 2230 (30mm) with Key B on SATA base
- SATA 3 - data transfer rate of up to max. 6 Gbit/s

Link: [ASSMANN Website](#)

Nr.: DA-71120

EAN: 4016032461432

Mini enclosure for M.2 NVMe PCIe SSD, USB 3.1 Type-C™

USB Type-C 3.1 External SSD Enclosure M.2 (NVMe) tool-free, alu housing, M-Key or B+M-Key

- Supports Mini SSD in M.2 NVMe PCIe format
- USB 3.1 (Gen. 2) - data transfer rate up to 10 Gbps
- No power adaptor required - power is supplied via USB-C™

Link: [ASSMANN Website](#)



Topic: Ergonomic Desk Frames (New Arrivals)**Products:**

| | | | |
|-------------|-------------------------------|-------------------------------|-------------------------------|
| Nr.: | DA-90430 | DA-90431 | DA-90432 |
| EAN: | 4016032482048 | 4016032482031 | 4016032482024 |

Electrically Height-Adjustable Table Frame, single motor, 2 levels

Electric Height Adjustable Desk Frame Single motor, 2-stages, different colors

- Maximum load capacity of up to 70kg
- Flexible frame - Suitable for tabletops 110-160 cm wide and 50-80cm deep
- Convenient electrical height adjustment (without tabletop): 71.5 - 121.5cm
- Black; white; grey

**Link:** [ASSMANN Website](#)

| | | | |
|-------------|-------------------------------|-------------------------------|-------------------------------|
| Nr.: | DA-90433 | DA-90434 | DA-90435 |
| EAN: | 4016032481980 | 4016032481997 | 4016032482017 |

Electrically Height-Adjustable Table Frame, dual motor, 3 levels, white

Electric Height Adjustable Desk Frame Dual motor, 3-stages, different colors

- Maximum load capacity of up to 100kg
- Flexible frame - Suitable for tabletops 110-200cm wide and 60-100cm deep
- Convenient electrical height adjustment (without tabletop): 62-127cm
- White; black; grey

**Link:** [ASSMANN Website](#)

| | |
|-------------|---------------|
| Nr.: | DA-90386 |
| EAN: | 4016032456445 |

Electric height-adjustable stand/ sit desk frame, 90° angle-shaped (L-shaped)

Electric Height Adjustable Desk Frame, 3-leg height 124-208cm, load: 120kg, white

- Electric height-adjustable desk base, height: 60 - 125cm, for two tabletops up to 125 - 140 & 190 - 210 cm, recommended depths: 55 - 90cm
- Angle-shaped - Can be mounted on both sides (right or left)
- With collision protection and a memory function for 4 height settings

**Link:** [ASSMANN Website](#)

Nr.: DA-90392

EAN: 4016032465102

Electric Height-Adjustable Desk Frame, 120° Corner Design

Height Adjustable Table Frame, 3-leg 120°, black

- Angle shape: 120° corner design
- Three powerful motors for smooth height setting
- Collision protection function can be set to 5 sensitivity level

Link: [ASSMANN Website](#)

Nr.: DA-90422

EAN: 4016032475279

Ergonomic Stool / Standing Aid, Height-Adjustable with Gas Pressure Spring

Standing Stool, height-adjustable, black

- Stay fit and mobile even while seated!
- Frameless foam cushion for pleasant seating comfort
- The sturdy base of the chair offers a stable yet flexible sitting/standing experience

Link: [ASSMANN Website](#)

--



Topic: HDBaseT Video Solutions

Products:

Nr.: DS-55512

EAN: 4016032480020

4K HDBaseT™ HDMI KVM Extender Set, 70m

HDBaseT HDMI KVM Extender 4K/30Hz, 70m, 10.2 Gbps, HDCP 2.2

- Extends the maximum length for HDMI cables to up to 70 m (Full HD, 1080p/60Hz) or 40m (UHD, 4K/30Hz) via a simple network cable
- KVM functionality (USB 1.1) for connection to mouse and keyboard
- PoC (Power over Cable) - Only the unit requires an external power adapter

Link: [ASSMANN Website](https://www.assmann.com)



Nr.: DS-55500

EAN: 4016032429449

4K HDMI Extender Set, HDBaseT™, 4K/30Hz, 70m

4K HDMI Extender Set, HDBaseT, UHD 4K*2K@30Hz 70m over network cable (Cat 5E, 6, 7)

- Extends the maximum length for HDMI cables to up to 70m whereby only a simple network cable is used between a sender and a receiver unit
- Extends 4K video contents to up to 40m with a CAT 6 cable
- Offers simple and quick distribution for HDMI video signals - position your monitors wherever you wish

Link: [ASSMANN Website](https://www.assmann.com)



Nr.: DS-55505

EAN: 4016032472667

4K HDMI® HDBaseT™ 2.0 KVM Extender Set, 100m

HDBaseT 2.0 HDMI KVM Extender Set 4K/60Hz (4:2:0), 6x USB

- Transmit high-resolution multimedia content without a loss of quality and uncompressed over distances of up to 100m
- Saves unnecessary cable relocation and pools multimedia signals along with many other signals in a single network cable
- Forwarding without loss of quality through transmission of uncompressed data

Link: [ASSMANN Website](https://www.assmann.com)



Nr.: DS-55523

EAN: 4016032483700

HDMI HDBaseT™ 3.0 Extender Set, 100m

HDBaseT 3.0 KVM Extender Set, 100m USB 2.0, PoC, RS232, IR, eARC/ARC, black

- HDBaseT™ 3.0 technology
- HDMI 2.0b, HDCP 2.2
- Uncompressed signal transmission in 4K/60Hz, 4:4:4 at 18 GB/s

Link: [ASSMANN Website](#)



Nr.: DS-55508

EAN: 4016032478942

4K HDBaseT™ HDMI Extender Set, 150m

HDBaseT HDMI Extender Set, 150m 4K/60Hz, 18 Gbps, YUV 4:4:4, HDR

- Supports HDBaseT™ 1.0 via CAT6A/7/8 cable up to 100m
- Supports 4K2K/60Hz (4:4:4)
- Maximum transmission distance (UHD 4K2K): 120m

Link: [ASSMANN Website](#)



Nr.: DS-55510

EAN: 4016032479307

4K HDBaseT™ 1x4 HDMI Extender Splitter Set, 150m

HDBaseT HDMI Extender Splitter Set, 150 m, 1x4 EDID, 4K/60Hz HDCP 2.2, HDR, POC, HDMI 2.0

- Supports HDBaseT™ 1.0 via CAT6A/7/8 up to 100m
- Supports 4K2K/60Hz (4:4:4)
- Maximum transmission distance (UHD 4K2K): 120m

Link: [ASSMANN Website](#)



Topic: HDMI - adapter cable | For your individual solution
Products:

Nr.: AK-330111-020-S
EAN: 4016032481119

HDMI Adapter Cable - HDMI to DisplayPort

HDMI to DP adapter cable, 2m, 4K@30Hz external Power via USB - A

- Converts HDMI signals to DisplayPort signals
- HDMI input => DisplayPort output with USB A connection for power supply
- Plug-and-Play installation

Link: [ASSMANN Website](#)



Nr.: AK-330101-002-S
EAN: 4016032481102

4K HDMI Adapter - HDMI to DisplayPort

HDMI M to DP F with external Power 4K@30Hz. 0,2m Black

- Converts HDMI signals to DisplayPort signals
- HDMI input => DisplayPort output with USB A connection for power supply
- Plug-and-Play installation

Link: [ASSMANN Website](#)



| | | | |
|---|-------------------------------|-------------------------------|-------------------------------|
| Nr.: AK-330300-020-S | AK-330300-030-S | AK-330300-050-S | AK-330300-100-S |
| EAN: 4016032295914 | 4016032295921 | 4016032295938 | 4016032295945 |

HDMI Adapter Cable

HDMI adapter cable, type A-DVI(18+1) M/M, 2.0m, Full HD, bl, different length

- Full HD, Single Link
- 2m; 3m; 5m; 10m

Link: [ASSMANN Website](#)



Nr.: AK-330403-002-S

EAN: 4016032433866

HDMI 3in1 Adapter / Converter

HDMI converter cable, HDMI - DP+DVI+VGA M-F/F/F, 0.2m, 3 in 1 Multi-Media, bl, gold

- Support 4K/2K with 30Hz
- Plug and Play Installation

Link: [ASSMANN Website](#)



Nr.: AK-330500-000-S

EAN: 4016032296140

HDMI Adapter

HDMI adapter, type A F/F, Ultra HD 60p, bl

- 4K/Ultra HD and 3D capable + Ethernet connectivity

Link: [ASSMANN Website](#)



Nr.: AK-330400-002-S

EAN: 4016032296119

HDMI Y-Splitter Cable

HDMI Y-splitter cable, type A -2xtype A M/F, 0.2m, passiv, Full HD, gold, bl

- Full HD, Dual-Link

Link: [ASSMANN Website](#)



Nr.: AK-330502-000-S

EAN: 4016032296164

HDMI adapter, 90° angled

HDMI adapter, type A, 90° angled M/F, Ultra HD 60p, bl, gold

- 4K/Ultra HD and 3D capable + Ethernet connectivity

Link: [ASSMANN Website](#)



Nr.: AK-330505-000-S

EAN: 4016032296195

HDMI Adapter

HDMI adapter, type A - DVI-I(24+5) M/F, Full HD, bl

- Full HD, Dual-Link

Link: [ASSMANN Website](https://www.assmann.com)



Topic: HDMI cable for demanding applications

Products:

Nr.: AK-330105-150-S

EAN: 4016032295808

HDMI High Speed Connection Cable, with Amplifier

HDMI High Speed connection cable, type A, w/ amp. M/M, 15.0m, Full HD, gold, bl

- Support Full HD / 1080p
- Supported Video formats: 1080p @24Hz, 1080p @30 or @60Hz; 3D
- Supported Audio format: DVD-Audio, SACD, Dolby Digital Plus, TrueHD and dts-HD

Link: [ASSMANN Website](#)



Nr.: AK-330107-010-S

| AK-330107-020-S

| AK-330107-050-S

| AK-330107-100-S

EAN: [4016032290940](#)

| [4016032290957](#)

| [4016032290971](#)

| [4016032307051](#)

HDMI High Speed with Ethernet Connection Cable

HDMI High Speed connection cable, type A M/M, 1.0m, Ultra HD 60p, gold, bl, different Length

- Supports UHD up to 4K/60Hz
- Supports 3D signal transmission
- Supports ARC (bidirectional audio transmission) - Use a microphone and speakers via a cable
- 1m; 2m; 5m; 10m

Link: [ASSMANN Website](#)



Nr.: DB-330123-010-S

| DB-330123-020-S

EAN: [4016032446637](#)

| [4016032446620](#)

HDMI High Speed with Ethernet Connection Cable

HDMI Premium High Speed connection cable, type A M/M, 1.0m, w/Ethernet, Ultra HD 60p, gold, bl, different length

- Support of HDMI 2.0 Features
- Support up to 4K/2K with 60Hz
- Support of High Dynamic Range (HDR)
- 1m; 2m

Link: [ASSMANN Website](#)



Nr.: DB-330300-020-S
EAN: 4016032383383

HDMI Adapter Cable

HDMI adapter cable, type A-DVI(18+1) M/M, 2.0m, Full HD, bl

- Full HD, Single Link
- Excellent video quality - up to 1920 x 1080 pixels at 60Hz

Link: [ASSMANN Website](#)



Nr.: AK-330201-020-S
EAN: 4016032291138

HDMI High Speed with Ethernet Extension Cable

HDMI High Speed extension cable, type A St/Bu, 2.0m, m/Ethernet, UHD@24Hz, gold, bl

Link: [ASSMANN Website](#)



Nr.: AK-330126-100-S | AK-330126-150-S | AK-330126-200-S
EAN: [4016032467038](#) | [4016032467045](#) | [4016032467052](#)

HDMI® AOC Hybrid Fiber Optic Cable, UHD 8K, 10m

HDMI AOC hybrid-fiber connection cable, Type A M/M, 10m, UHD 8K@60Hz, gold, bl, different length

- Active fiber optic data transfer of up to 48 Gbps - zero frame delay
- Resolutions of up to 8K@60Hz
- Transfers uncompressed HDMI® video and audio signals over a distance of 10m
- 10m; 15m; 20m

Link: [ASSMANN Website](#)



Nr.: AK-330124-010-S
EAN: 4016032454298

HDMI Ultra High Speed Connection Cable

HDMI Ultra High Speed connection cable, type A M/M, 1.0m, w/Ethernet, UHD 8K 60Hz, gold, bl

- This cable is ideal for home cinema and gaming applications due to the support of High Dynamic Range (HDR) and Dolby® True HD.
- This Ultra High Speed HDMI® cable features 2 gold-plated HDMI (male) connectors and durable high quality construction to provide a dependable HDMI connection.
- This high quality HDMI cable fully supports up to 8K resolutions at 60Hz refresh rate and 4K resolutions at up to 120Hz refresh rate, with life-like color.

Link: [ASSMANN Website](#)



Topic: High Flex HDMI cable - space-saving and almost invisible

Products:

Nr.: DB-330121-020-S

EAN: 4016032391326

HDMI High Speed connection cable, type C- A, HighFlex

HDMI High Speed con. cable, type C - A, HighFlex M/M, 2.0m, 4K Ultra HD@30Hz, active, gold, bl

- Supports resolutions up to Ultra HD 4K
- Highly flexible cable with small diameter
- Gold-plated contacts for best transmission properties



Link: [ASSMANN Website](https://www.assmann.com)

Nr.: DB-330120-020-S

EAN: 4016032391319

HDMI High Speed connection cable with Ethernet, type A, high flexible

HDMI High Speed connection cable, type A, HighFlex M/M, 2.0m, 4K Ultra HD@30Hz, active, gold, bl

- Supports resolutions up to Ultra HD 4K
- Highly flexible cable with small diameter
- Gold-plated contacts for best transmission properties



Link: [ASSMANN Website](https://www.assmann.com)

Topic: Home Office, Video conferencing

Products:

Nr.: DA-12211

EAN: 4016032474883

On Ear Bluetooth Headset with Docking Station

Bluetooth Office Headset, On Ear, volume control, incl. docking station

- Multipoint connection: Simultaneous connection with 2 devices possible, easy switching
- Perfect for simultaneous use of private and business phones
- Bluetooth 5.0 for stable transmission and faster connection

Link: [ASSMANN Website](#)

Nr.: DA-12203

EAN: 4016032474869

On Ear Office Headset with Noise Reduction, USB

Stereo Office Headset, On Ear, noise reduction cable 1,95m, control unit, USB

- Noise reduction at the microphone – suppresses disruptive environmental noises
- Integrated control module for volume control and mute (mic/headphones)
- Excellent voice quality (20 - 20,000Hz)

Link: [ASSMANN Website](#)

Nr.: DA-12204

EAN: 4016032474876

On Ear Office Headset with Noise Reduction, USB

Stereo Office Headset, On Ear, noise reduction cable 1.95m, control unit, USB

- Noise reduction at the microphone – suppresses disruptive environmental noises
- Integrated control module for volume control and mute (mic/headphones)
- LED display indicates muting of microphone

Link: [ASSMANN Website](#)



Nr.: DA-12221

EAN: 4016032475132

Mobile Conference Speaker, Bluetooth and USB compatible

Bluetooth Conference Speaker 40 mm x4, 10W / DC 5V 1A, 3.5mm AUX

- With this Bluetooth speaker, you can transform any room into a conference room
- Dual connection possible via Bluetooth or USB cable
- Clear voice quality thanks to 4 integrated speakers / microphones



Link: [ASSMANN Website](#)

Nr.: DA-71901

EAN: 4016032467588

Full HD Webcam 1080p with Autofocus, Wide Angle

Full HD 1080p Webcam Auto focus, Wide view angle

- High-resolution Full HD CMOS image sensor with 1080p resolution
- Auto focus from 7cm to unlimited, automatic focus adjustment
- Wide angle of 90°



Link: [ASSMANN Website](#)

Topic: Keep a cool head - Roof- and Split Cooling Devices for Network- and Server Cabinets
Products:

Nr.: DN-97330

EAN: 4016032473497

Top cooling unit, 2.5kW

Top cooling unit, 2.5kW 390 x 600 x 1110mm

- The inverter, compressor and EC fan operate at high efficiency to maintain the temperature in the housing.
- Precise and protective constant cooling control.
- Easy installation on racks and micro data center solutions

Link: [ASSMANN Website](#)

Nr.: DN-97331

EAN: 4016032473503

Top cooling unit, 5.5kW

Top cooling unit, 5.5kW 390 x 600 x 1110mm

- The inverter, compressor and EC fan operate at high efficiency to maintain the temperature in the housing.
- Precise and protective constant cooling control.
- Easy installation on racks and micro data center solutions.

Link: [ASSMANN Website](#)

Nr.: DN-97332

EAN: 4016032473510

Split rack cooling unit, 3.9kW

Split rack cooling unit, 6U, 3.9kW rackmount unit 266 x 483 x 828mm & outdoor unit

- The inverter, compressor and EC fan operate at high efficiency to maintain the temperature in the housing.
- Precise and protective constant cooling control.
- Standard size for cabinet installation (6 rack units) can be flexibly installed into existing systems.

Link: [ASSMANN Website](#)



Nr.: DN-97333

EAN: 4016032473527

Split rack cooling unit, 7.2kW

Split rack cooling unit, 10U, 7.2 kW rackmount unit 445 x 483 x 828mm & outdoor unit

- The inverter, compressor and EC fan operate at high efficiency to maintain the temperature in the housing.
- Precise and protective constant cooling control.
- Standard size for cabinet installation (10 rack units) can be flexibly installed into existing systems.

Link: [ASSMANN Website](#)



Nr.: DN-97334

EAN: 4016032473534

Split rack cooling unit, 12kW

Split rack cooling unit, 12U, 12kW rackmount unit 533 x 483 x 828mm & outdoor unit

- The inverter, compressor and EC fan operate at high efficiency to maintain the temperature in the housing.
- Precise and protective constant cooling control.
- Standard size for cabinet installation (12 rack units) can be flexibly installed into existing systems.

Link: [ASSMANN Website](#)



Topic: KVM - consoles providing maximum flexibility

Products:

Nr.: DS-72210-2GE | DS-72210-3GE
EAN: [4016032449300](#) | [4016032449317](#)

Modular console with 17" TFT (43,2cm), 8-port KVM & Touchpad, german keyboard

Modularized 43,2cm (17") TFT console with 8 port KVM, German keyboard, RAL 9005 black

- Modular console with 17" TFT (43,2cm), 8-port KVM & Touchpad, german keyboard
- Flexible configuration depending on area of application
- Space-saving casing with 1U design height

Link: [ASSMANN Website](#)

Nr.: DS-72211-3GE
EAN: 4016032449362

Modular console with 19" TFT (48,3cm), 16-port KVM & Touchpad, german keyboard

Modularized 48,3cm (19") TFT console with 16 port KVM, DE keyboard, RAL 9005 black

- Modular console with 19" TFT (48,3cm), 16-port KVM & Touchpad, german keyboard
- Flexible configuration depending on area of application
- Space-saving casing with 1U design height

Link: [ASSMANN Website](#)

| | | | | |
|-------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Nr.: | DS-72000CH | DS-72000ES | DS-72000FR | DS-72000GE |
| | DS-72000IT | DS-72000RU | DS-72000TR | DS-72000UK |
| | DS-72000US | | | |
| EAN: | 4016032356240 | 4016032356219 | 4016032356042 | 4016032356066 |
| | 4016032356097 | 4016032356134 | 4016032356363 | 4016032356400 |
| | 4016032356387 | | | |

Keyboard Suitable for TFT Consoles, Swiss Layout

Keyboard for TFT consoles black, wired, different layout

- Swiss; Spanish; French; German; Italian; Russian; Turkish; British; American

Link: [ASSMANN Website](#)



Nr.: DS-51000-1


EAN: 4016032430018

IP Function Module for KVM Switches

IP function module for KVM switches for DS-23200-2, DS-23000-2, remote control

- Remotely access computers via LAN, WAN, or the Internet
- Full control under all OS, in BIOS level, during boot, or at Blue Screens

Link: [ASSMANN Website](https://www.assmann.com)

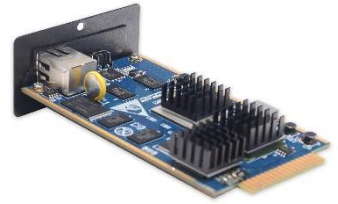

Topic: Secure basic power distribution solutions for devices in 19" Network & Server cabinets

Products:

Nr.: DN-95426

EAN: 4016032483472

Socket strip with aluminum profile, 12-way, 2m cable safety plug

1U Aluminum PDU, rackmountable, 12 x C13 16A, 230VAC, 50/60Hz, Safety plug

- Perfect current distribution for your network and IT rack
- Compact construction, 19" 1U housing
- The jacks offer optimal space management and easy access

Link: [ASSMANN Website](#)

Nr.: DN-95427

EAN: 4016032483533

Socket Strip with Aluminum Profile, 10-way, 2m cable IEC C20 plug

1U Aluminum PDU, rackmountable, 8 x C13, 2 x C19 16A, 230VAC, 50/60Hz, IEC C20 plug

- Perfect current distribution for your network and IT rack
- Optimal current distribution for connection to a UPS (IEC-60320 C20 input connector)
- The jacks offer optimal space management and easy access

Link: [ASSMANN Website](#)

Nr.: DN-95428

EAN: 4016032483540

Socket Strip with Aluminum Profile, 8-way safety socket, 2 m cable, IEC C20 plug

1U Aluminum PDU, rackmountable, 8 x Safety outlet 16A, 230VAC, 50/60Hz, IEC C20 plug

- Perfect current distribution for your network and IT rack
- Compact construction, 19" 1U housing
- Optimal current distribution for connection to a UPS (IEC-60320 C20 input connector)

Link: [ASSMANN Website](#)



Nr.: DN-95429

EAN: 4016032483557

Socket Strip with Aluminum Profile, 9-way, IEC C14 input

1U Aluminum PDU, rackmountable, 9 x C13 10A, 230VAC, 50/60Hz, IEC C14 inlet, 10A Fuse

- Perfect current distribution for connection to a UPS (IEC-60320 C14 input)
- Compact construction, 19" 1U housing
- 10A input fuse protects the PDU and the connected consumers against excess voltage.



Link: [ASSMANN Website](#)

Nr.: DN-95430

EAN: 4016032483564

Socket Strip with Aluminum Profile, 9-way, IEC C20 input

1U Aluminum PDU, rackmountable, 7 x C13, 2 x C19 16A, 230VAC, 50/60Hz, IEC C20 inlet

- Perfect current distribution for your network and IT rack
- Optimal current distribution for connection to a UPS (IEC-60320 C20 input connector)
- The jacks offer optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95431

EAN: 4016032483571

Socket strip with aluminum profile, 7 safety sockets, 2m cable with surge protection

1U Aluminum PDU, rackmountable, 7 x Safety outlet 16A, 230VAC, 50/60Hz, Overvoltage protection

- Perfect current distribution for your network and IT rack.
- Integrated surge protection protects connected users from overvoltage.
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95432

EAN: 4016032483588

Socket strip with aluminum profile and surge protection, integrated line filter, 6 safety sockets, 2m cable safety plug

1U Aluminum PDU, rackmountable, 6 x Safety outlet

16A,230VAC,50/60Hz,Overvoltage protection

- Perfect current distribution for your network and IT rack
- Integrated line filter and surge protection module protect the connected consumers against disruptions from the grid
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95433

EAN: 4016032483595

Socket strip with aluminum profile and switch, surge protection, integrated line filter, 5-way safety sockets, 2 m cable safety plug

1U Aluminum PDU, rackmountable, 5 x Safety outlet 16A,230VAC,50/60Hz,overvoltage,Net filter, Switch

- Perfect current distribution for your network and IT rack
- The illuminated switch is protected against accidentally being switched off
- Integrated line filter and surge protection module protect the connected consumers against disruptions from the grid



Link: [ASSMANN Website](#)

Nr.: DN-95434

EAN: 4016032483601

Socket strip with aluminum profile, 12-way safety sockets, 2m cable safety plug

1U Aluminum PDU, rackmountable, 12 x Safety outlet 16A, 230VAC, 50/60Hz, 2m cable

- Perfect current distribution for your network and IT rack
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95435

EAN: 4016032483618

Socket strip with aluminum profile with switch and surge protection, 12-way safety sockets, 2m cable safety plug

1U Aluminum PDU, rackmountable, 12 x Safety outlet 16A, 230VAC, 50/60Hz, overvoltage, Switch

- Perfect current distribution for your network and IT rack
- The illuminated switch is protected against accidentally being switched off
- Integrated surge protection protects connected users from overvoltage.



Link: [ASSMANN Website](#)

Nr.: DN-95418-FR

EAN: 4016032482000

10" socket strip with aluminum profile, 4-way CEE 7/5 sockets

1U Aluminum PDU, 254 mm (10") rack mount, 4x CEE 7/5 outlet, 16A, 4000W, 250VAC 50/60Hz

- Perfect current distribution for your network and IT rack
- Compact construction, 10" 1U housing
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95402-1-FR

EAN: 4016032481959

Socket strip with aluminum profile and switch, 8-way CEE 7/5, 2m cable safety plug with grounding contact

1U Aluminum PDU, rackmountable, 8x CEE 7/5 rated power: 16A, 4000W, 250VAC 50/60Hz,

- Perfect power source for your 482.6 mm (19") housing
- Safety thanks to doubly grounded safety plug
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95407-FR

EAN: 4016032481966

Socket strip with aluminum profile and switch, 7-way CEE 7/5 sockets, 2m cable with surge protection and switch

1U Aluminum PDU, rackmountable, 7x CEE 7/5 16A Plug, 250VAC 50/60Hz, switch, surge Protection

- Perfect current distribution for your network and IT rack
- Integrated surge protection protects connected users from overvoltage.
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95410-IT

EAN: 4016032483861

Socket strip with aluminum profile and back-up fuse, 8-way Italian output, 2m cable IEC C14 plug

1U Aluminum PDU, 8x Italian outlets, Pre-fuse 10A Plug, 250VAC 50/60Hz, IEC C14 plug

- Perfect power source for your 482.6mm (19") housing
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95403-IT

EAN: 4016032483878

Socket strip with aluminum profile and surge protection, 7-way Italian output, 2m cable Italian plug

1U Aluminum PDU, 7x Italian outlet 16A, 4000W, 250VAC 50/60Hz, overload protection

- Perfect power source for your 482.6mm (19") housing
- Jacks are rotated by up to 35°, which offers optimal space management and easy access
- Integrated surge protection ensures maximum safety



Link: [ASSMANN Website](#)

Nr.: DN-95412-IT

EAN: 4016032483885

Socket strip with aluminum profile and surge protection, integrated line filter, 7-way Italian socket, 2 m cable Italian plug

Aluminium PDU, 7x Italian outlet, Frequency filter 16A, 4000W, 250VAC 50/60Hz, 2m

- Perfect current distribution for your network and IT rack
- Integrated line filter and surge protection module protect the connected consumers against disruptions from the grid
- Jacks are rotated by up to 35°, which offers optimal space management and easy access



Link: [ASSMANN Website](#)

Nr.: DN-95402-1-IT

EAN: 4016032483892

Socket strip with aluminum profile and switch, 8-way Italian output, 2 m cable Italian plug

1U Aluminum PDU, 8x Italian outlet 16A, 4000W, 250VAC 50/60Hz, switch

- Perfect power source for your 482.6 mm (19") housing
- Jacks are rotated by up to 35°, which offers optimal space management and easy access
- The illuminated switch is protected against accidentally being switched off



Link: [ASSMANN Website](#)

Topic: Secure remote power distribution solutions for your Edge applications

Products:

Nr.: DN-95628

EAN: 4016032473374

Smart PDU, Outlet monitored, 1-phase, 16A, 16 x C13

Outlet monitored PDU, vertical, 16A, 16x C13 3m cable, IEC309 16A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of input and output values
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)



Nr.: DN-95634

EAN: 4016032473367

Smart PDU, Outlet Monitored & Switched, 1-phase, 16A, 18 x C13, 6 x C19

Outlet monitored & switch PDU, Vertical 18x C13 & 6x C19, 3m, IEC60309 16A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of input and output values and switching of outlets possible
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)



Nr.: DN-95625

EAN: 4016032473282

Smart PDU, Input monitored, 1-phase, 32A, 36 x C13, 6 x C19

Inlet monitored PDU, vertical, 32A, 36x C13, 6x C19 2x 16A circuit breaker, 3m cable, IEC309 32A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of the input value
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)



Nr.: DN-95632
EAN: 4016032473343

Smart PDU, Outlet Monitored & Switched, 1-phase, 32A, 20 x C13, 4 x C19

Outlet monitored&switch PDU, Vertical 32A, 20xC13&4xC19, 3m, IEC60309 32A plug

- Supports remote access via web, SNMP or Telnet
- Monitoring of input and output values and switching of outlets possible
- Configurable system with user-defined threshold value setting

Link: [ASSMANN Website](#)



Nr.: DN-95640
EAN: 4016032481614

Smart PDU, input monitored, input 1x16A, outputs 20 x C13, 4 x C19

Inlet monitored PDU,vertical,16A,20xC13,4xC19 3m cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages.
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)



Nr.: DN-95641
EAN: 4016032481621

Smart PDU, input monitored, input 3x16A, outputs 36 x C13, 6 x C19

Inlet monitored PDU, 3Ph, 16A,36xC13,6xC19 3m cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages.
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)



Nr.: DN-95642
EAN: 4016032481638

Smart PDU, input monitored, input 3x32A, outputs 30 x C13, 12 x C19

Inlet monitored PDU, 3Ph, 32A, 30xC13,12xC19 6x 16A Circuit breaker, 3m cable, IEC309 3x32A plug

- Monitors various parameters with defined thresholds and alarm tools
- Various measurements enable early detection of potential outages
- Up to five PDUs can be accessed with one IP connection; this makes simple and economical installation in your network possible.

Link: [ASSMANN Website](#)



Nr.: DN-95643

EAN: 4016032481645

Smart PDU, output monitored & switched, input 1x16A, outputs 20 x C13, 4 x C19

Outlet monitored&switch. PDU, 20xC13,4xC19 3m Cable, IEC60309 16A plug

- Monitors various parameters with defined thresholds and alarm tools
- Controls and manages individual outputs or groups
- Various measurements enable early detection of potential outages.

Link: [ASSMANN Website](#)



Topic: Shelves inclusive cable management for high load capacities

Products:

Nr.: DN-97680

EAN: 4016032483465

Shelf with cable management

1U fixed shelf for 600mm depth cabinets incl. cable management, grey

- Cable management brackets and cable feedthroughs on the front side

Link: [ASSMANN Website](#)

Nr.: DN-97681

EAN: 4016032483489

Shelf with cable management

1U fixed shelf for 600mm depth cabinets incl. cable management, black

- 1U fixed shelf for 600 mm depth cabinets incl. cable management, black

Link: [ASSMANN Website](#)

Nr.: DN-97682

EAN: 4016032483496

Shelf with cable management

1U fixed shelf for 800mm depth cabinets incl. cable management, grey

- Cable management brackets and cable feedthroughs on the front side

Link: [ASSMANN Website](#)

Nr.: DN-97683




EAN: 4016032483502

Shelf with cable management

1U fixed shelf for 800mm depth cabinets incl. cable management, black

- Cable management brackets and cable feedthroughs on the front side

Link: [ASSMANN Website](#)

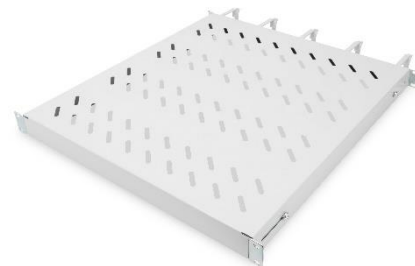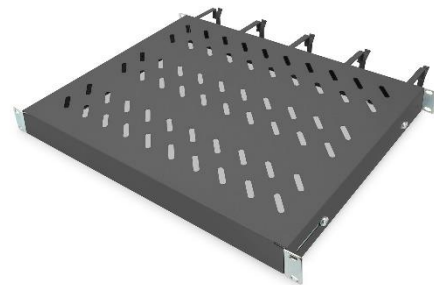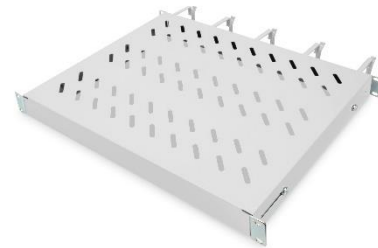

Nr.: DN-97684

EAN: 4016032483519

Shelf with cable management

1U fixed shelf for 1000mm depth cabinets incl. cable management, grey

- Cable management brackets and cable feedthroughs on the front side

Link: [ASSMANN Website](#)



Nr.: DN-97685

EAN: 4016032483526

Shelf with cable management

1U fixed shelf for 1000mm depth cabinets incl. cable management, black

- Cable management brackets and cable feedthroughs on the front side

Link: [ASSMANN Website](#)



Nr.: DN-19 SRV-26U-1

EAN: 4016032331339

Server Rack Unique Series - 600x1000mm (WxD)

26U server rack, Unique, 1340x600x1000mm perforated steel doors, color grey (RAL 7035)

- Special roof construction for fan unit, incl. perforated cover
- Lock system with pivot lever on front- and rear door (incl. profile half cylinder lock)
- Sliding cable entry with rubber sealing on the top and base

Link: [ASSMANN Website](#)



Nr.: DN-19 32U-6/6-D

EAN: 4016032336457

Network Rack Dynamic Basic Series - 600x600mm (WxD)

32U network rack, Dynamic Basic 1590x600x600mm, color grey (RAL 7035)

- Roof is prepared for fan units (punched out entries)
- Lockable pivot lever on front door
- Base with punched out cable entry, covered with screwed metal plate

Link: [ASSMANN Website](#)



Nr.: DN-19 36U-6/8-1

EAN: 4016032332312

Network Rack Unique Series - 600x800mm (WxD)

36U network rack, Unique 1787x600x800mm, color grey (RAL 7035)

- Special roof construction for fan unit with added lid which can be unmounted
- Lock system with pivot lever on front door (ready for profile half cylinder; adapter included)
- Sliding cable entry with rubber sealing on the base

Link: [ASSMANN Website](#)



Nr.: DN-19 SRV-42U-8-B

EAN: 4016032331766

Server Rack Unique Series - 800x1000mm (WxD)

42U server rack, Unique, 2050x800x1000mm perforated steel doors, color black (RAL 9005)

- Special roof construction for fan unit, incl. perforated cover
- Lock system with pivot lever on front- and rear door (incl. profile half cylinder lock)
- Sliding cable entry with rubber sealing on the top and base

Link: [ASSMANN Website](#)



Topic: Spiral cables for the car
Products:

Nr.: AK-600433-006-S
EAN: 4016032482574

USB 2.0 - USB A to Lightning Spiral Cable

USB Type A to Lightning Spring cable MFI C89 TPU USB 2.0, PD20W Max

- The spiral cable can extend from 32cm up to 1m.
- MFI certification - compatible with all Lightning devices (C89 Chipset)
- Supports fast charging for compatible end devices

Link: [ASSMANN Website](#)



Nr.: AK-600434-006-S
EAN: 4016032482567

USB 2.0 - USB C to Lightning Spiral Cable

USB - C to Lightning Spring cable MFI C94 TPU USB 2.0, PD20W Max 1m

- The spiral cable can extend from 32cm up to 1m.
- MFI certification - compatible with all Lightning devices (C89 Chipset)
- Supports fast charging for compatible end devices

Link: [ASSMANN Website](#)



Nr.: AK-300430-006-S
EAN: 4016032482543

USB 2.0 - USB A to USB C Spiral Cable

USB Type A to USB Type C Spring cable TPE USB 2.0, PD60W Max; 1m

- The spiral cable can extend from 32cm up to 1m
- Supports the USB PD (Power Delivery) specification - charging power of 60W (20V/3A)
- Thanks to the USB High-Speed standard, rapid synchronization is provided with a data transfer rate of up to 480 Mbit/s

Link: [ASSMANN Website](#)



Nr.: AK-300431-006-S

EAN: 4016032482550

USB 2.0 - USB C to USB C Spiral Cable

USB - Type C to USB - Type C Spring cable, TPU USB 2.0, PD60W Max; 1m

- The spiral cable can extend from 32cm up to 1m.
- Supports the USB PD (Power Delivery) specification - charging power of 60W (20V/3A)
- Thanks to the USB High-Speed standard, rapid synchronization is provided with a data transfer rate of up to 480 Mbit/s

Link: [ASSMANN Website](https://www.assmann.com)

